




**Feature :**

Compact size  
SMD reflow soldering

**Application :**


Various Electrical applications



### SWITCH SPECIFICATIONS

POLE - POSITION	SPST(ON-OFF);DPST(ON-ON)
RATING	VA : 0.2 W ; V : 24 VDC(MAX.) ; I : 50 mA(MAX.) ; 10 μA(MIN.)
CONTACT RESISTANCE	300 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	10 MΩ MIN. 100 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	2N ( ≈205 gf ) MAX.
OPERATING LIFE	50,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	1.4+0.2/-0.1 mm

► **HOW TO ORDER**




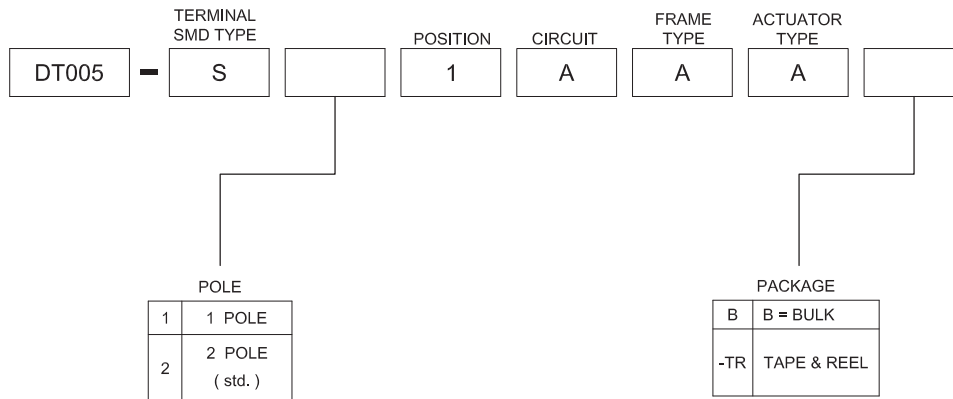





► DIMENSION

DT005-S11AAA □


DT005-S21AAA □

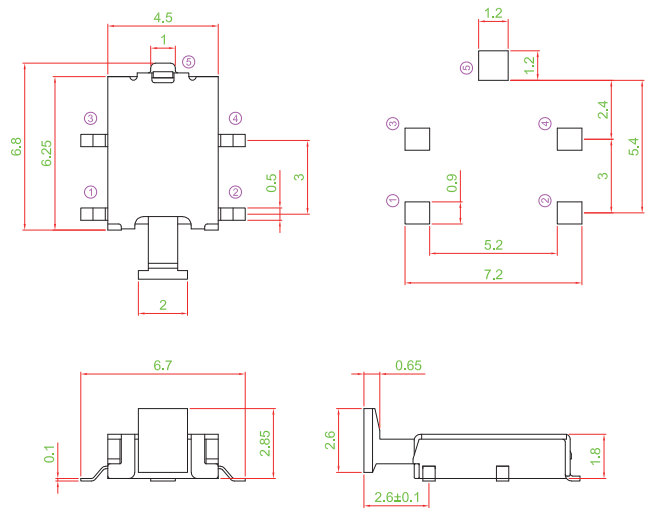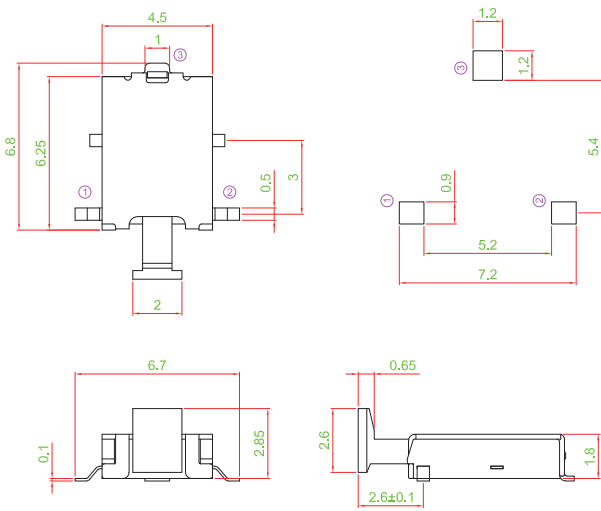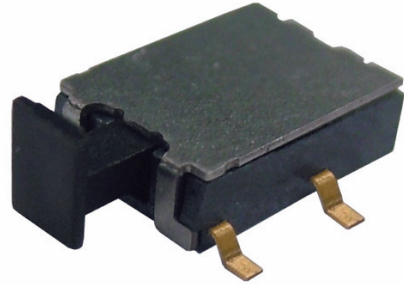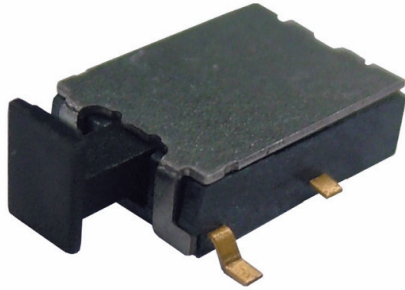

► CIRCUIT



DT005-S11AAA □



DT005-S21AAA □

- TACT SWITCH
- PUSH BUTTON SWITCH
- LED TOUCH SENSOR SWITCH
- 5 DIRECTION NAVIGATION SWITCH WITH LED
- MEMBRANE SWITCH
- LED LIGHT BAR
- SLIDE SWITCH
- ROTARY SWITCH
- ROCKER SWITCH
- DETECT SWITCH
- ENCODER
- INTERRUPTER
- MINIATURE MICRO SWITCH
- TELEPHONE HOOK SWITCH
- DOOR SWITCH
- MINI SIZE SOCKET
- KNOB
- CAP SYMBOL