WELL BUYING INDUSTRIAL CO., LTD

Feature:

Bi-color LED illuminated available SPST

Lock / non-lock function

Application:

Computer products Office appliance

Communication equipments




SWITCH SPECIFICATIONS						
POLE - POSITION	Momentary Type , LOCK Type with LED					
CONTACT RATING	36 V DC , 0.2 A					
CONTACT RESISTANCE	40 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP					
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC					
DIELECTRIC STRENGTH	Breakdown Is not Allowable ; 500 V AC for 1 Minute					
OPERATING FORCE	NON-LOCK TYPE: 1POLE: 200±100 gf; 2POLE: 300±100 gf LOCK TYPE: 1 & 2 POLE: 300 ± 100 gf					
OPERATING LIFE	10,000 cycles					
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C					
TOTAL TRAVEL	FULL TRAVEL : 2.4 ± 0.3 mm CONTACT TRAVEL : 1.6 ± 0.3 mm					

LED SPECIFICATIONS									
ATTENTION LEDS are Electrostatic Sensitive devices (+) O (-) (-)	ic Unit	Value / LED Color							
		Blue	Pure Green	Red	Yellow	Orange	Green	White	
LUMINOUS INTENSITY@20 Iv)mA mcd	900	6500	900	1300	900	400	1200	
Dominant Wavelength λD	nm	470	525	635	590	601	570	/	
FORWARD VOLTAGE@20 Vf	mA V	3.2	3.3	1.95	2	2.1	2.1	4	

A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

► HOW TO ORDER

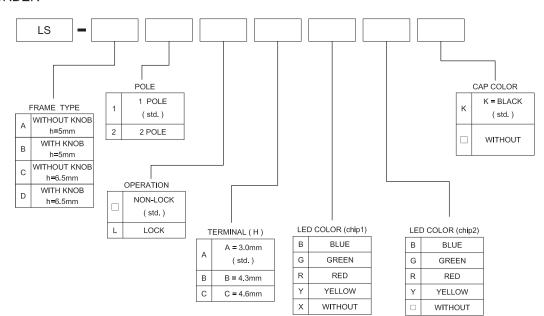










DIMENSION

LS - A1A 🗌 🗌





















LS - D1C 🗆 🗆 K














CIRCUIT

