


**Feature :**

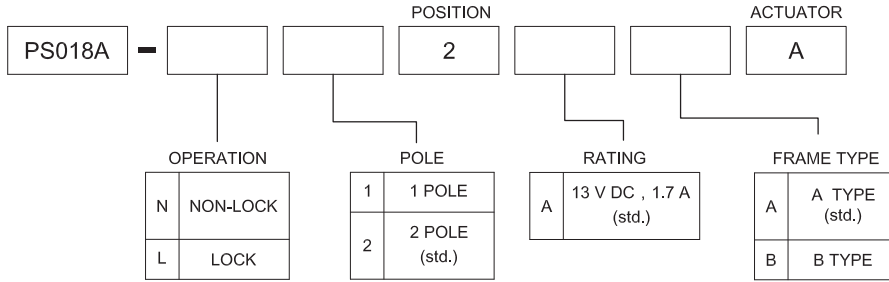
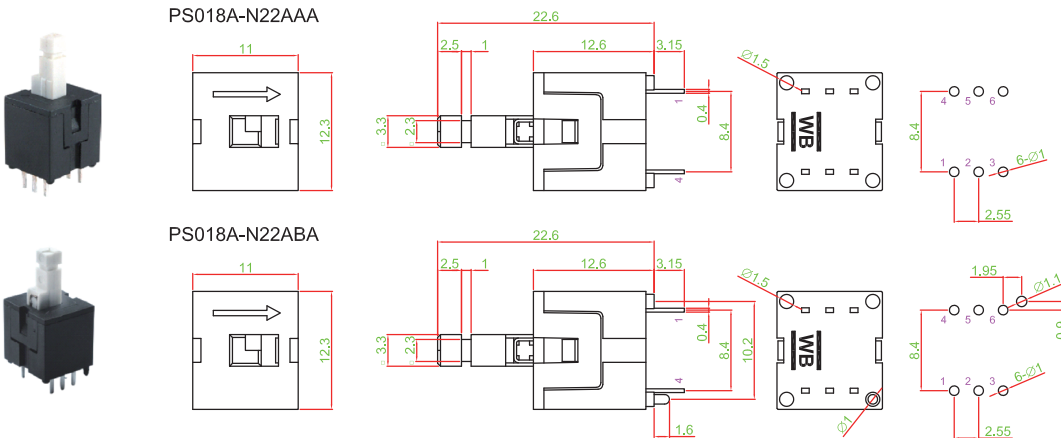

Rating: 1.7A, 13VDC,  
SPDT or DPDT  
Lock / non-lock function

**Application :**

Automotive  
Consumer products  
Computer products  
Communication equipments


**SWITCH SPECIFICATIONS**

POLE - POSITION	1P2T or 2P2T , Lock type are Available
CONTACT RATING	13 V DC , 1.7 A
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC ; 100 mA , by method of voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not allowable ; 500 V AC for 1 minute
OPERATING FORCE	400 ± 200 gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	3.5 ± 0.3 mm

**▶ HOW TO ORDER**

**▶ DIMENSION**

**▶ CIRCUIT**


TACT SWITCH  
PUSH BUTTON SWITCH  
LED TOUCH SENSOR SWITCH  
5 DIRECTION NAVIGATION SWITCH WITH LED  
MEMBRANE SWITCH  
LED LIGHT BAR  
SLIDE SWITCH  
ROTARY SWITCH  
ROCKER SWITCH  
DETECT SWITCH  
ENCODER  
INTERRUPTER  
MINIATURE MICRO SWITCH  
TELEPHONE HOOK SWITCH  
DOOR SWITCH  
MINI SIZE SOCKET  
KNOB  
CAP SYMBOL