




### Feature :

Small dimension  
Max. 8 positions


### Application :

High value toy  
Power strip voltage selector  
Selection key on the application  
AV machine, video recorder




SWITCH SPECIFICATIONS	
POLE - POSITION	1P8T , 2P4T
CONTACT RATING	30 V DC , 0.5 A
CONTACT RESISTANCE	25 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	1P8T : 1000 ± 300 gf.cm
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C

### ▶ HOW TO ORDER

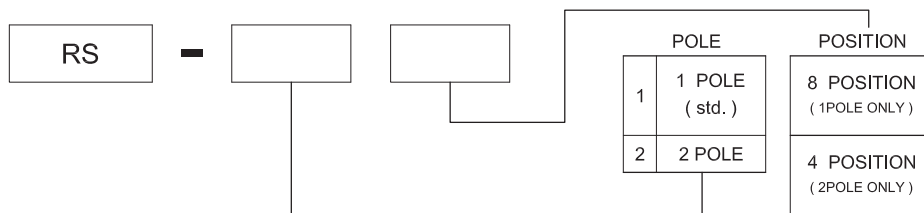


### ▶ DIMENSION

RS - 18

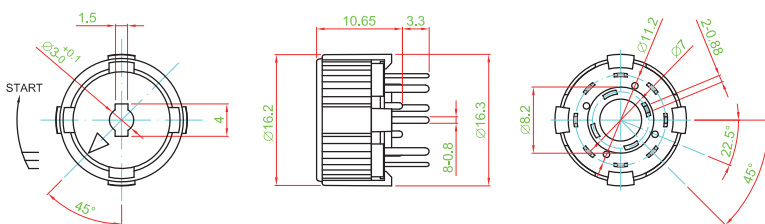


### ▶ P.C.B. LAYOUT

RS-18




RS-24




### ▶ CIRCUIT

RS-18



RS-24



TACT SWITCH  
PUSH BUTTON SWITCH  
LED TOUCH SENSOR SWITCH  
5 DIRECTION NAVIGATION SWITCH WITH LED  
MEMBRANE SWITCH  
LED LIGHT BAR  
SLIDE SWITCH  
ROTARY SWITCH  
ROCKER SWITCH  
DETECT SWITCH  
ENCODER  
INTERRUPTER  
MINIATURE MICRO SWITCH  
TELEPHONE HOOK SWITCH  
DOOR SWITCH  
MINI SIZE SOCKET  
KNOB  
CAP SYMBOL