Feature :

- Compact size
- P.C.B terminal

Application :

- Consumer products
- Computer products
- Instrumentation
- Communication equipments
- Hand-held devices

SWITCH SPECIFICATIONS	
POLE - POSITION	3P2T , P.C.B TYPE
CONTACT RATING	50 V DC , 0.5 A
CONTACT RESISTANCE	30 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	300 ± 150gf MAX.
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	3.8 ± 0.2 mm

▶ HOW TO ORDER

		TERMINAL P.C.B TYPE	POLE	POSITION	NON-SHORTING	FRAME TYPE	ACTUATOR MATERIAL	ACTUATOR	ACTUATOR (L)=2
SS002	-	P	3	2	N	A	P	A	2

▶ DIMENSION

SS002 - P32NAPA2

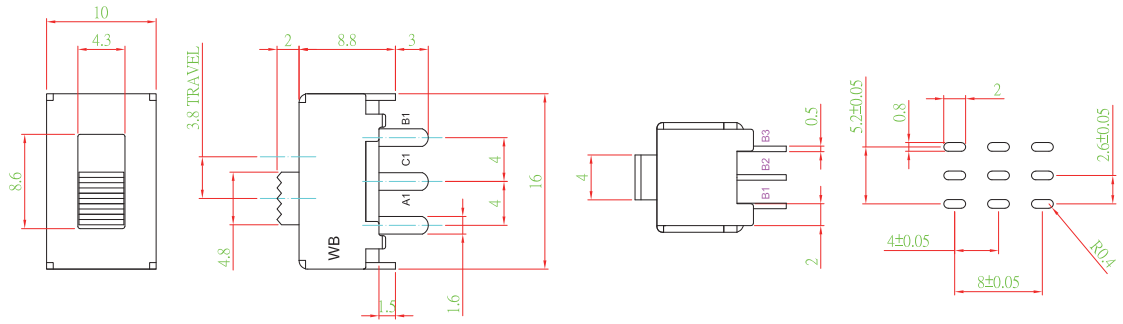

▶ CIRCUIT DIAGRAM